




VICINITY MAP

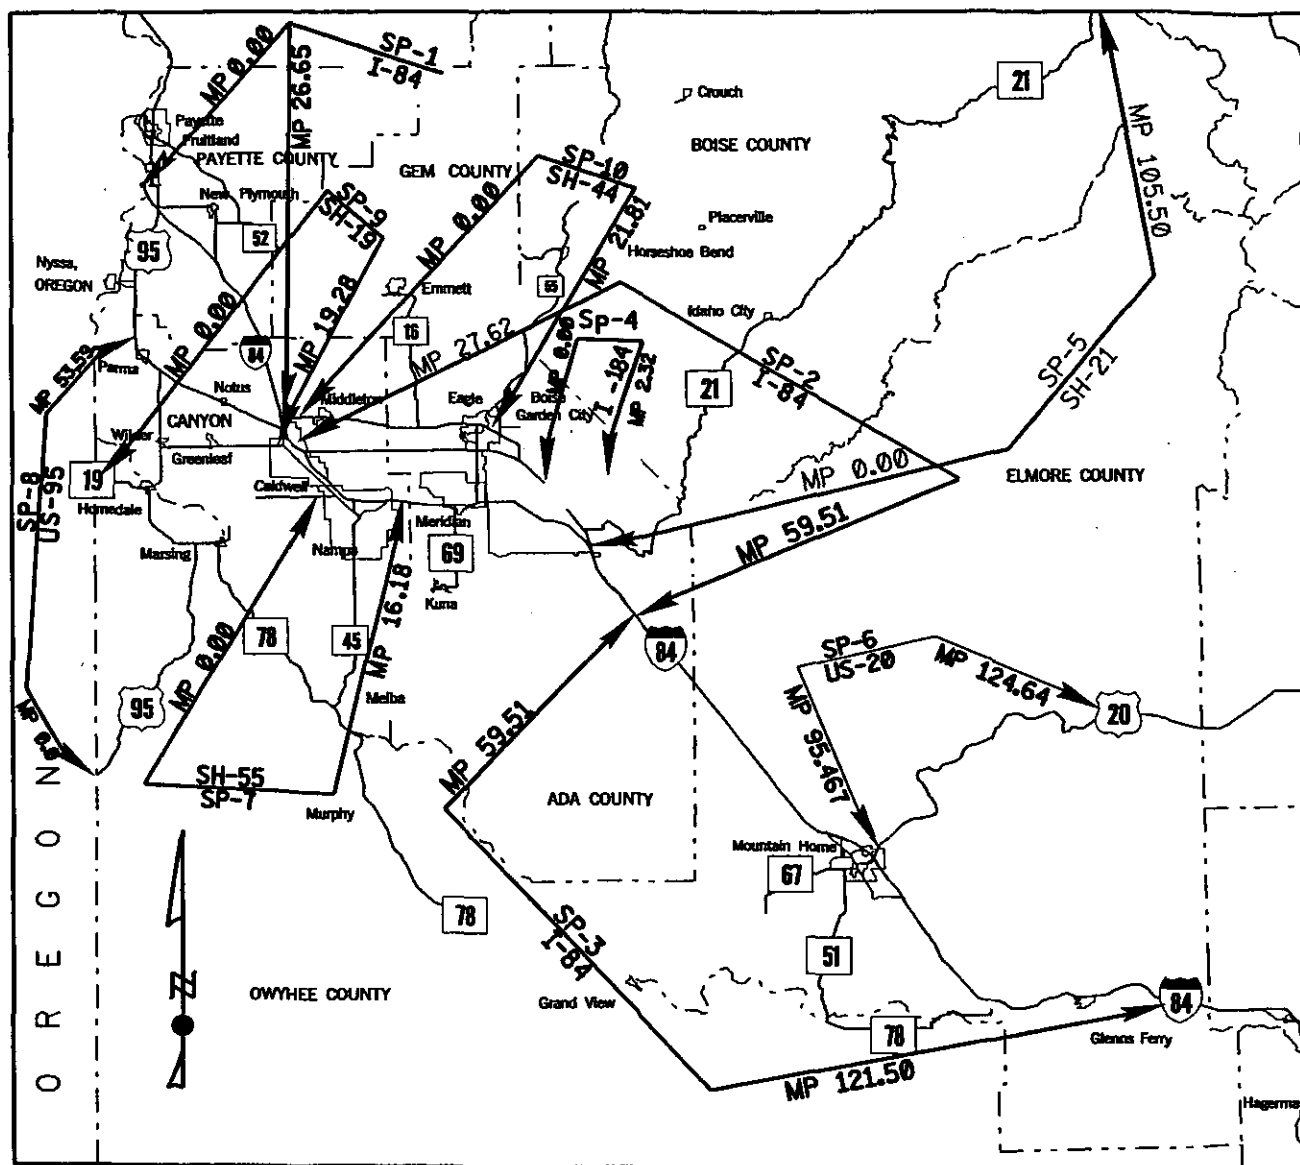

FY05 DISTRICTWIDE MOWING (A)




I-184, I-84, SH-19, SH-21, SH-44,
SH-55, US-20 & US-95

ADA, BOISE, CANYON, ELMORE, OWYHEE & PAYETTE COUNTIES



DETAIL SHEET

BLACKS CREEK REST AREA
I-84 (MP 62.07-62.43)

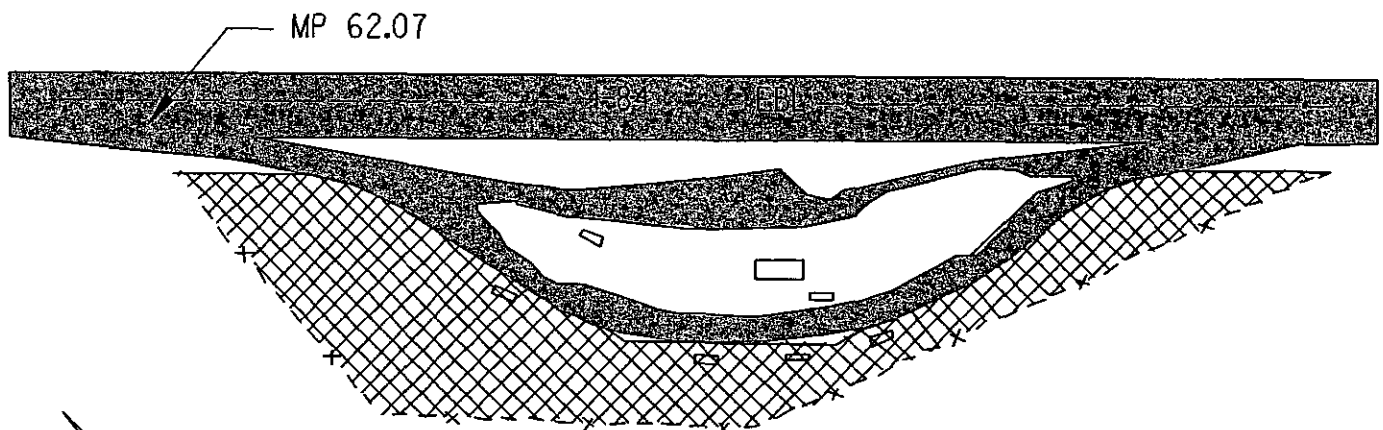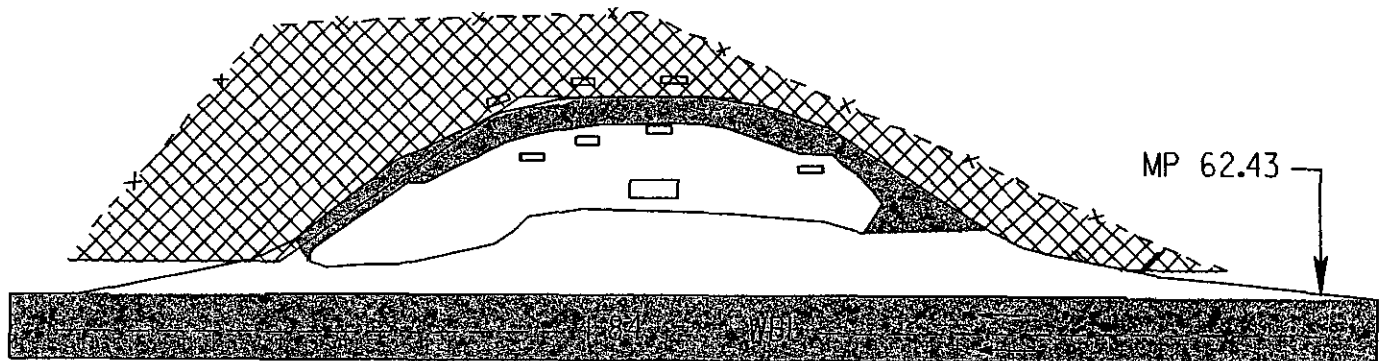

N.T.S.

LEGEND



ROADWAY




AREA TO
BE MOWED



FENCE




DETAIL SHEET

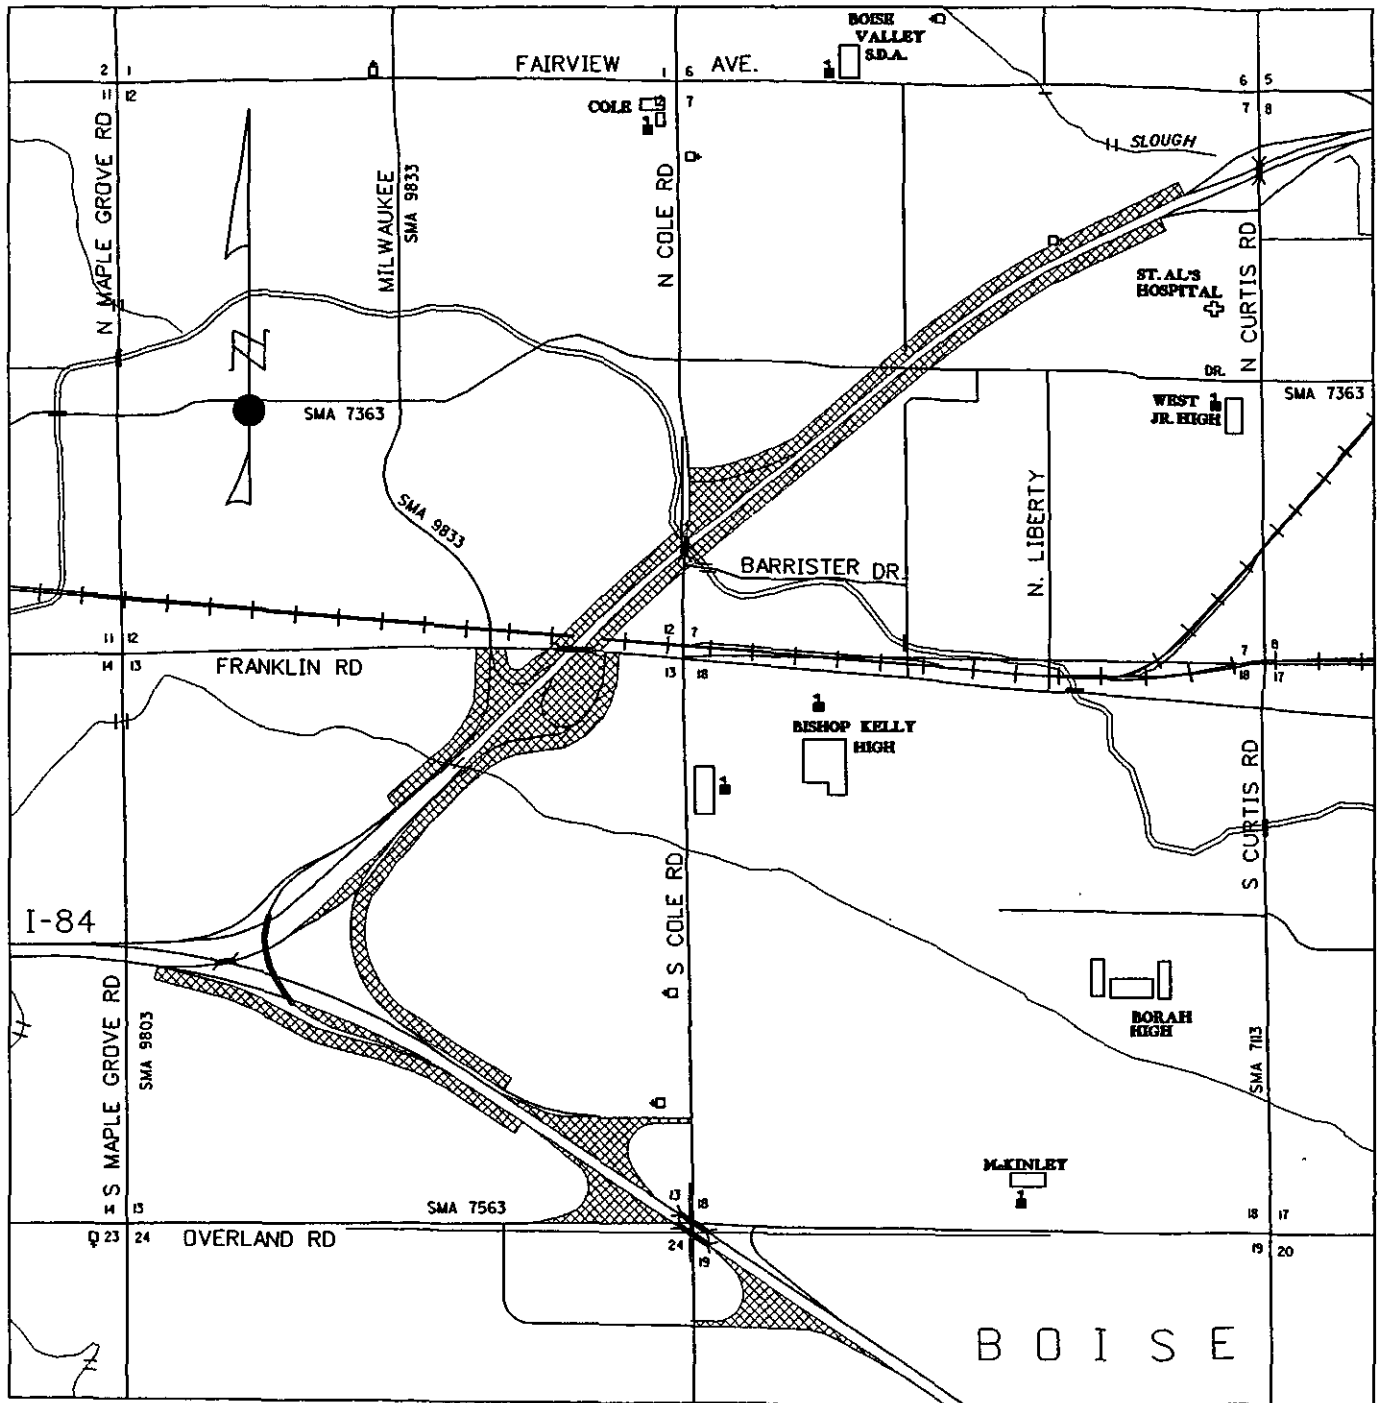

IDAHO TRANSPORTATION DEPARTMENT

I-184 STM-3003

KEY#3002 ADA COUNTY


 MOWING AREA N.T.S



DETAIL SHEET

Typical Freeway
Interchange

Typical Emergency
Median Crossover

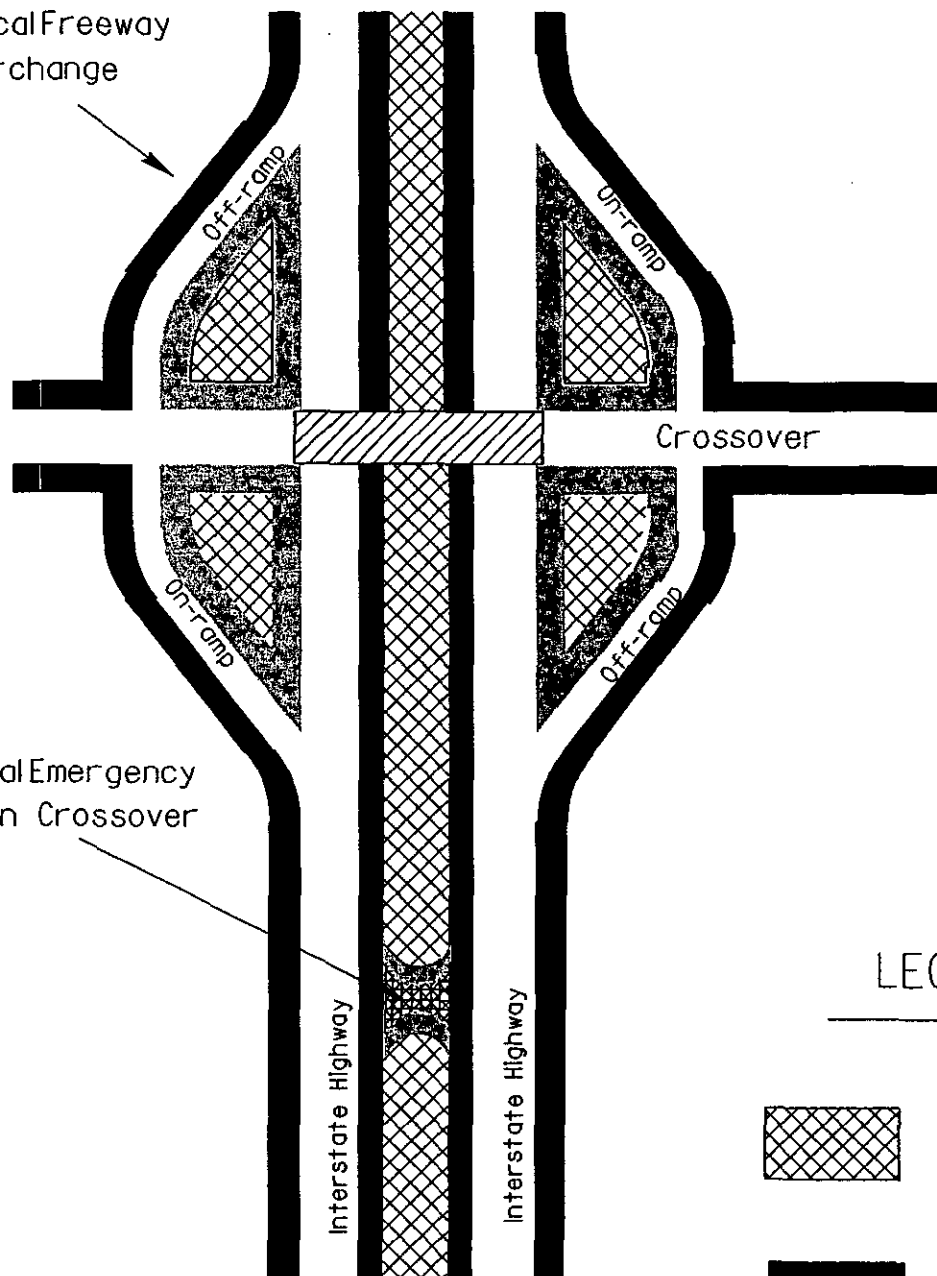

Typical Mow Width → | ←
(See specific SP for actual
mowing width specifications)

LEGEND



Area to
be mowed
as Specified



Area to
be mowed



Emergency
Median
Cross-over




Bridge Deck

N.T.S.




DETAIL SHEET

MAXIMUM CUTTING HEIGHT

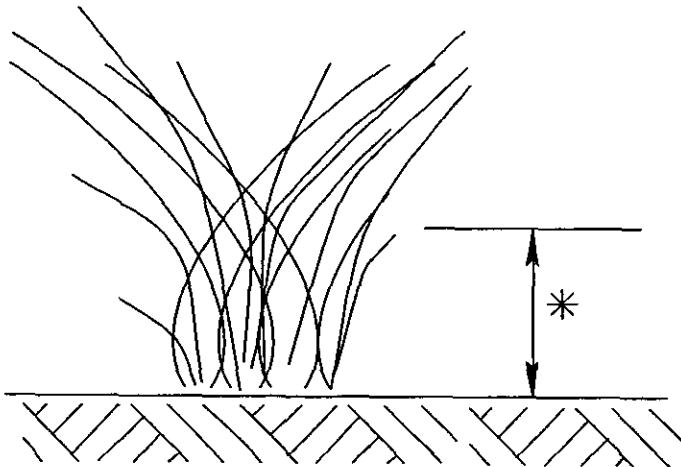

* SP-1 THRU SP-10 MOWING
HEIGHT 6 inches

CUT SECTION

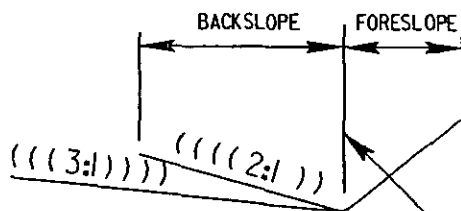


FILL SECTION

HEIGHT OF NATURAL GROWTH
SHALL NOT EXCEED HEIGHT
OF CROWN LINE.

MOW ALL SLOPES 3:1 OR FLATTER. ON
SLOPES STEEPER THAN 3:1, MOW 6 FEET
WIDE MEASURED FROM EDGE OF VEGETATION.

SLOPE GRADIENTS

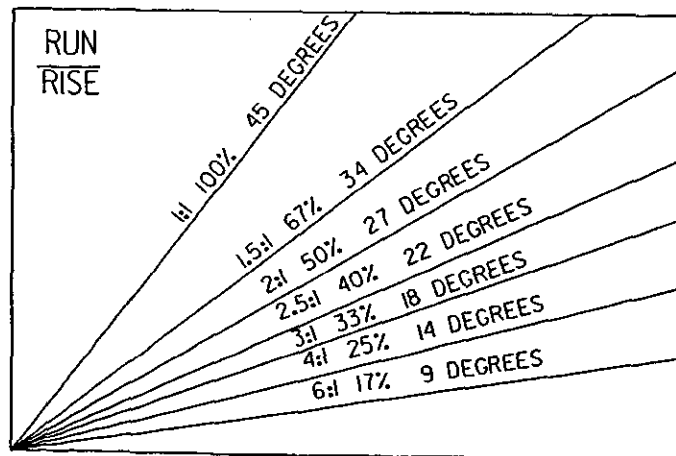

N.T.S.



SUMMARY

ADA, BOISE, CANYON, ELMORE,
OWYHEE & PAYETTE COUNTIES

<u>PAY ITEM</u>	<u>MILES</u>	<u>ACRES</u>
SP-1 MOWING (I-84 MP 0.00 TO 26.65)	53.30	
SP-2 MOWING (I-84 MP 27.62 TO 59.51)		543.00
SP-3 MOWING (I-84 MP 59.51 TO 121.50)	123.98	
SP-4 MOWING (I-184 MP 0.00 TO 2.32)	•SEE NOTE BELOW	
SP-5 MOWING (SH-21 MP 0.00 TO 105.50)	100.83	
SP-6 MOWING (US-20 MP 95.47 TO 124.64)	29.17	
SP-7 MOWING (SH-55 MP 0.00 TO 16.18) NAMPA, MARSING AREAS	16.18	
SP-8 MOWING (US-95 MP 0.00 TO 53.59)	53.59	
SP-9 MOWING (SH-19 MP 0.00 TO 19.28)	15.04	
SP-10 MOWING (SH-44 MP 0.00 TO 21.81)	21.81	
SP-11 RENTAL OF SPECIAL EQUIPMENT	hour	
SP-12 TRUCK MOUNTED IMPACT ATTENUATOR (COMPLETE)	LUMP SUM	



ADA, BOISE, CANYON, ELMORE,
OWYHEE & PAYETTE COUNTIES

INDEX OF SHEETS

SHEET INDEX

SUMMARY

DETAIL SHEETS

TRAFFIC CONTROL

BID SCHEDULE

SHEET 11 OF 18

SHEET 12 OF 18

SHEET 13-16 OF 18

SHEET 17 OF 18

SHEET 18 OF 18

NOTE:

All work on this project shall be governed by the IDAHO STANDARD SPECIFICATIONS for HIGHWAY CONSTRUCTION, Edition of 2004, the SEPTEMBER 2004 SUPPLEMENTAL SPECIFICATIONS and the SPECIAL PROVISIONS.

IDAHO TRANSPORTATION DEPARTMENT
Division of Highways

APPROVED _____

ASSISTANT CHIEF ENGINEER

DATE _____



STM-3003 MOWING CONTRACTS (A)

WHEN MOWING BOTH SIDES OF THE ROADWAY, MOWING OPERATIONS SHALL BE SEPARATED BY NO LESS THAN ONE HALF MILE

* MOWING OPERATIONS NOT TO EXCEED 2 MILES OF THE REQUIRED STAND ALONE SIGNS ALONG THE ROADWAY.

